


K12 SYSTEM L 244 Drop down

With KIMANA hinges. Opening with handle.

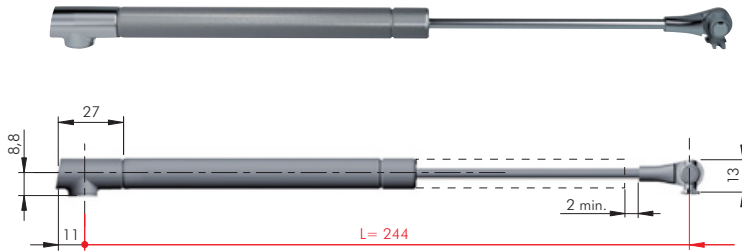


ZAnk EP ST

= 50 pcs.

Rev. 01

48060200UZ

0



h	Door weight (Kg)																	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
300	1 x K12		2 x K12			3 x K12						4 x K12						
350	1 x K12	2 x K12		3 x K12						4 x K12								
400	1 x K12	2 x K12		3 x K12			4 x K12											
450	1 x K12	2 x K12		3 x K12			4 x K12											
500	1 x K12	2 x K12		3 x K12			4 x K12											

These are experimental results to be checked by the customer. **In accordance with the actual European regulation, we suggest to use at least two stays for each door.** Our technical department is at your disposal to test further cases out of this chart.

BRACKETS Ø15:

SCREW FIXING BRACKETS:

The dimensions of the above drilling plan refer to carcasses which use **Kimana hinges**.

VERY IMPORTANT: for Kimana hinges at least 2 K12 System stays are required for any door width.

For pistons quantity to be specified according to door size, refer to the chart for "K12 System 244 mm - DROP DOWN".

X +	Y +	L1
16 + 4	16 + 2	208
16 + 4	19	210
18 + 2	19	208
19	16 + 2	204
19	19	206
20	20	206

